


# Data sheet

## 1581.4 RKD 4/35/SV BK

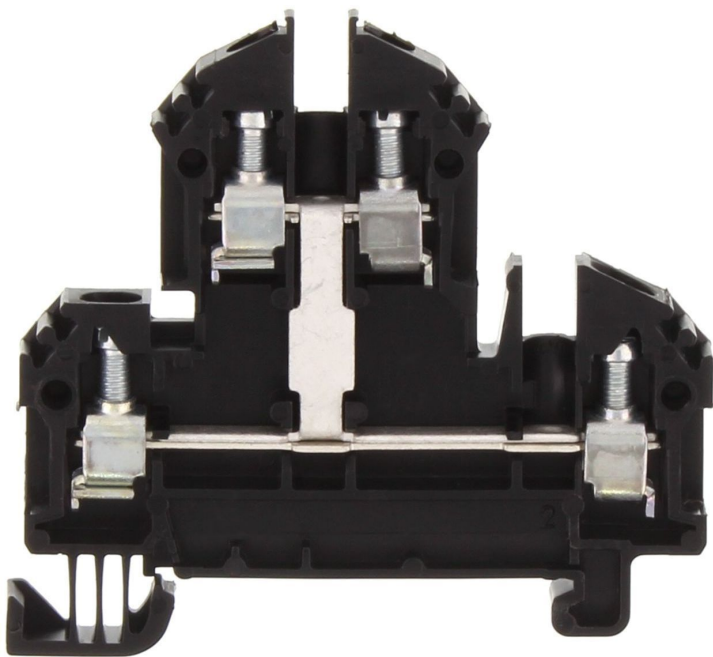

Double-level terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 4 mm<sup>2</sup>, Width: 6 mm, Colour: Black

**RAL:** 9005

### Business data

|                                            |                       |
|--------------------------------------------|-----------------------|
| Article number                             | <u>1581.4</u>         |
| Article name                               | RKD 4/35/SV BK        |
| GTIN (EAN)                                 | 4044211132293         |
| Packaging unit                             | 100                   |
| Quantity unit                              | PC                    |
| Weight per piece (not including packaging) | 13.2 g                |
| Weight per piece (including packaging)     | 14.1 g                |
| Unit of weight                             | G                     |
| Customs number                             | 85369010              |
| Country of origin                          | CZ                    |
| Prio-Article                               | 1581.2                |
| Product description                        | Double-level terminal |

### Technical data

#### Dimensions

|                  |         |
|------------------|---------|
| Length           | 60.2 mm |
| Width            | 6 mm    |
| Height TS 35/7.5 | 56 mm   |

#### Ratings

|                                                 |                   |
|-------------------------------------------------|-------------------|
| Rated voltage                                   | 500 V             |
| Rated current                                   | 32 A              |
| Rated cross-section                             | 4 mm <sup>2</sup> |
| Rated impulse voltage                           | 6 kV              |
| Overvoltage category                            | III               |
| Contamination degree                            | 3                 |
| Maximum power dissipation for nominal condition | 2.05 W            |

#### Connection data

|                                                          |                     |
|----------------------------------------------------------|---------------------|
| Connection principle                                     | Screw connection    |
| Connection position                                      | Lateral             |
| Connections                                              | 4                   |
| Number of terminals per level                            | 2                   |
| Number of levels                                         | 2                   |
| Levels internally bridged                                | ✓                   |
| Wire cross-section single-core (rigid) / stranded, min.  | 0.2 mm <sup>2</sup> |
| Wire cross-section single core (rigid)/stranded, max.    | 4 mm <sup>2</sup>   |
| Wire cross-section stranded, min.                        | 0.2 mm <sup>2</sup> |
| Wire cross-section stranded, max.                        | 4 mm <sup>2</sup>   |
| Wire cross-section stranded with wire-end ferrules, min. | 0.2 mm <sup>2</sup> |
| Wire cross-section stranded with wire-end ferrules, max. | 4 mm <sup>2</sup>   |
| Wire cross-section AWG, min.                             | 22                  |
| Wire cross-section AWG, max.                             | 12                  |
| Stripping length                                         | 9 mm                |
| Screw head                                               | Slotted             |
| Screw threading                                          | M 3                 |
| Tightening torque, min.                                  | 0.5 Nm              |
| Tightening torque, max.                                  | 1 Nm                |

### Technical data

#### Materials

|                           |               |
|---------------------------|---------------|
| Insulation housing        | Polyamide 6.6 |
| Flammability class UL 94  | V-2           |
| Working temperature, min. | -40 °C        |
| Working temperature, max. | 105 °C        |

#### Further technical data

|                                     |                         |
|-------------------------------------|-------------------------|
| Mounting type                       | Mounting rail TS 35/7,5 |
| Gauge plug acc. to EN 60 947-1      | A4                      |
| Number of cross-connection channels | 1                       |
| End plate required                  | ✓                       |
| Number of test pick-off options     | 1                       |

#### Environmental Product Compliance

|                                |            |
|--------------------------------|------------|
| REACH Conform                  | yes        |
| REACH Reference date           | 2023-06-14 |
| REACH Candidate Substance Note | No         |
| RoHS Conform                   | yes        |

### Approvals

#### Standards and regulations

|                      |                |
|----------------------|----------------|
| EAC approval         | TR ZU 004/2011 |
| EAC approval granted | yes            |

#### CSA approval

|                                  |              |
|----------------------------------|--------------|
| CSA approval                     | C22.2 No 158 |
| CSA approval granted             | yes          |
| CSA Usegroup C: rated voltage    | 300 V        |
| CSA Usegroup C: rated current    | 30 A         |
| CSA wire cross-section AWG, min. | 22           |
| CSA wire cross-section AWG, max. | 12           |
| CSA stripping length             | 9 mm         |



#### CSAus approval

|                                    |         |
|------------------------------------|---------|
| CSAus approval                     | UL 1059 |
| CSAus approval granted             | yes     |
| CSAus Usegroup C: rated voltage    | 300 V   |
| CSAus Usegroup C: rated current    | 30 A    |
| CSAus wire cross-section AWG, min. | 22      |
| CSAus wire cross-section AWG, max. | 12      |
| CSAus stripping length             | 9 mm    |


#### KEMA KEUR approval

|                                                   |                     |
|---------------------------------------------------|---------------------|
| KEMA KEUR approval                                | EN 60947-7-1:2009   |
| KEMA KEUR approval granted                        | yes                 |
| KEMA rated voltage                                | 500 V               |
| KEMA rated current                                | 32 A                |
| KEMA rated impulse voltage                        | 6 kV                |
| KEMA wire cross-section single core (rigid), min. | 0.2 mm <sup>2</sup> |
| KEMA wire cross-section single-core (rigid), max. | 4 mm <sup>2</sup>   |
| KEMA wire cross-section stranded, min.            | 0.2 mm <sup>2</sup> |
| KEMA wire cross-section stranded, max.            | 4 mm <sup>2</sup>   |

Media

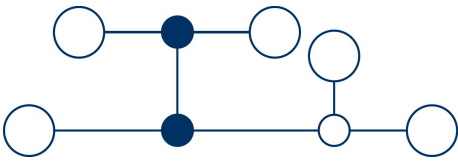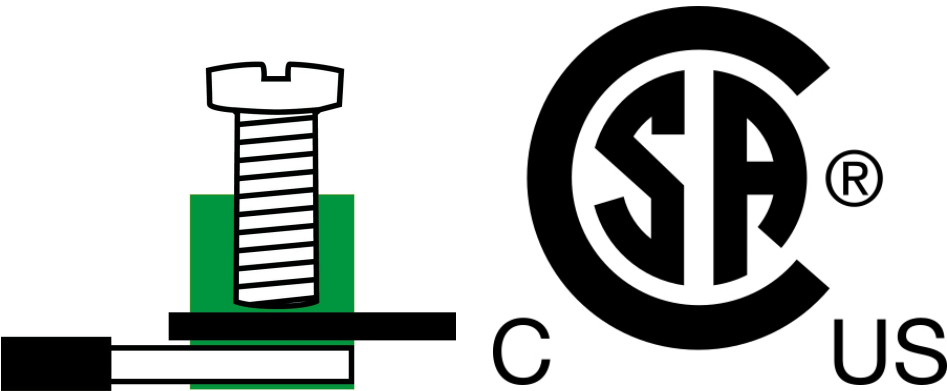

EAC

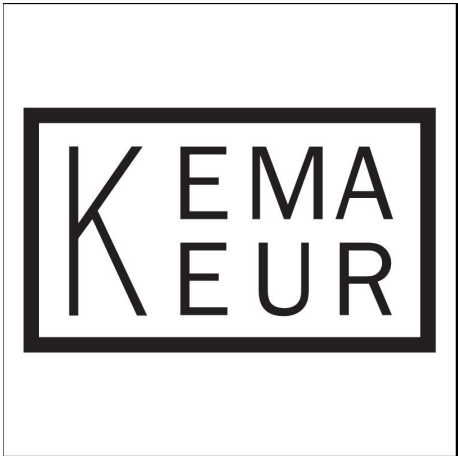

Accessories

End plate



End plate, Width: 1.5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2101.2</u>  | AP 4 BG      | 4044211151652 | 20             |

Insulation plate



Insulation plate, Colour: Beige

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2566.2</u>  | TRS 3 BG     | 4044211053567 | 100 ST         |

Cross-connector



Cross-connector, No. of poles: 4, Mounting type: Can be screwed on, Width: 19.3 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: natural

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2569.0</u>  | Q 4          | 4044211053598 | 20 ST          |



Cross-connector, No. of poles: 10, Mounting type: Can be screwed on, Width: 49.9 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: natural


| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2570.0</u>  | Q 10         | 4044211053604 | 10 ST          |



Cross-connector, No. of poles: 3, Mounting type: Can be screwed on, Width: 14.2 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: natural

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2568.0</u>  | Q 3          | 4044211053581 | 50 ST          |

### Cross-connector



Cross-connector, No. of poles: 2, Mounting type: Can be screwed on, Width: 9.1 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: natural

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2567.0</u>  | Q 2          | 4044211053574 | 50 ST          |

### Quick marking



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 5 mm, Colour: White

| Article number | Article name   | GTIN (EAN)    | Packaging unit |
|----------------|----------------|---------------|----------------|
| <u>4600.7</u>  | PMC SB 5/50 WH | 4044211088903 | 500 ST         |

### Test adapters



Test adapter, Length: 37.3 mm, Pitch size: 5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2821.0</u>  | TAD 5/1/S    | 4044211055479 | 10 ST          |

### Screwdriver



Screwdriver with bare blade, Colour: Black-grey

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>1085.0</u>  | SDB 0,5x3,0  | 4044211014643 | 1 ST           |