


Data sheet

2046.4 AP SI-1 BK

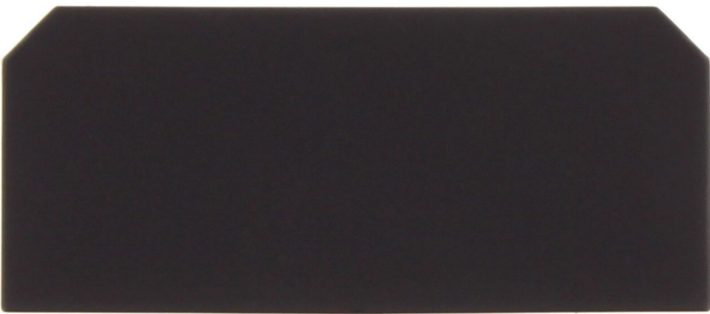

End plate, Width: 1.5 mm, Colour: Black

RAL: 9005

Business data

|  |               |
|--|---------------|
| Article number                             | 2046.4        |
| Article name                               | AP SI-1 BK    |
| GTIN (EAN)                                 | 4044211132774 |
| Packaging unit                             | 50            |
| Quantity unit                              | PC            |
| Weight per piece (not including packaging) | 1.95 g        |
| Weight per piece (including packaging)     | 1.96 g        |
| Unit of weight                             | G             |
| Customs number                             | 85389099      |
| Country of origin                          | DE            |
| Prio-Article                               | 2046.2        |
| Product description                        | End plate     |

# Data sheet

## 2046.4 AP SI-1 BK



### Technical data

#### Dimensions

|                |         |
|----------------|---------|
| Length         | 52.5 mm |
| Width          | 1.5 mm  |
| Min. thickness | 1.5 mm  |
| Height         | 22.8 mm |

#### Materials

|                           |               |
|---------------------------|---------------|
| Material                  | Polyamide 6.6 |
| Flammability class UL 94  | V-2           |
| Working temperature, min. | -40 °C        |
| Working temperature, max. | 105 °C        |

#### Further technical data

|                       |   |
|-----------------------|---|
| Designed as end plate | ✓ |
| Snap-on available     | ✓ |

#### Environmental Product Compliance

|                                |            |
|--------------------------------|------------|
| REACH Conform                  | yes        |
| REACH Reference date           | 2023-06-14 |
| REACH Candidate Substance Note | No         |
| RoHS Conform                   | yes        |


---

**Media**

---


Accessories

##INVERSE##CONTA-CONNECT




Fuse-disconnect terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 4 mm², Width: 8 mm, Colour: Beige

| Article number         | Article name            | GTIN (EAN)    | Packaging unit |
|------------------------|-------------------------|---------------|----------------|
| <a href="#">2451.2</a> | STK 1/LED(RD)/60V DC BG | 4044211052416 | 100 ST         |




Fuse-disconnect terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 4 mm², Width: 8 mm, Colour: Beige

| Article number         | Article name             | GTIN (EAN)    | Packaging unit |
|------------------------|--------------------------|---------------|----------------|
| <a href="#">2457.2</a> | STK 1/LED(RD)/115V AC BG | 4044211052478 | 100 ST         |




Fuse-disconnect terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 4 mm², Width: 8 mm, Colour: Beige

| Article number         | Article name | GTIN (EAN)    | Packaging unit |
|------------------------|--------------|---------------|----------------|
| <a href="#">2190.2</a> | STK 1 BG     | 4044211050115 | 100            |




Fuse-disconnect terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 4 mm², Width: 8 mm, Colour: Beige

| Article number         | Article name             | GTIN (EAN)    | Packaging unit |
|------------------------|--------------------------|---------------|----------------|
| <a href="#">2452.2</a> | STK 1/LED(RD)/115V DC BG | 4044211052423 | 100 ST         |



Fuse-disconnect terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 4 mm², Width: 8 mm, Colour: Beige

| Article number         | Article name            | GTIN (EAN)    | Packaging unit |
|------------------------|-------------------------|---------------|----------------|
| <a href="#">2454.2</a> | STK 1/LED(RD)/24V AC BG | 4044211052447 | 100 ST         |




Fuse-disconnect terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 4 mm², Width: 8 mm, Colour: Beige

| Article number         | Article name            | GTIN (EAN)    | Packaging unit |
|------------------------|-------------------------|---------------|----------------|
| <a href="#">2455.2</a> | STK 1/LED(RD)/48V AC BG | 4044211052454 | 100 ST         |

# Data sheet


## 2046.4 AP SI-1 BK

### ##INVERSE##CONTA-CONNECT




Fuse-disconnect terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 4 mm<sup>2</sup>, Width: 8 mm, Colour: Beige

| Article number | Article name            | GTIN (EAN)    | Packaging unit |
|----------------|-------------------------|---------------|----------------|
| <u>2449.2</u>  | STK 1/LED(RD)/24V DC BG | 4044211052393 | 100 ST         |




Fuse-disconnect terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 4 mm<sup>2</sup>, Width: 8 mm, Colour: Beige

| Article number | Article name             | GTIN (EAN)    | Packaging unit |
|----------------|--------------------------|---------------|----------------|
| <u>2453.2</u>  | STK 1/LED(RD)/230V DC BG | 4044211052430 | 100 ST         |




Fuse-disconnect terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 4 mm<sup>2</sup>, Width: 8 mm, Colour: Beige

| Article number | Article name             | GTIN (EAN)    | Packaging unit |
|----------------|--------------------------|---------------|----------------|
| <u>2458.2</u>  | STK 1/LED(RD)/230V AC BG | 4044211052485 | 100 ST         |




Fuse-disconnect terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 4 mm<sup>2</sup>, Width: 8 mm, Colour: Beige

| Article number | Article name            | GTIN (EAN)    | Packaging unit |
|----------------|-------------------------|---------------|----------------|
| <u>2456.2</u>  | STK 1/LED(RD)/60V AC BG | 4044211052461 | 100 ST         |



Fuse-disconnect terminal, Screw connection, Mounting type: Mounting rail TS 15/5.5, Rated cross-section: 4 mm<sup>2</sup>, Width: 8 mm, Colour: Beige

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2191.2</u>  | STK 1/15 BG  | 4044211050160 | 100            |




Fuse-disconnect terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 4 mm<sup>2</sup>, Width: 8 mm, Colour: Beige

| Article number | Article name            | GTIN (EAN)    | Packaging unit |
|----------------|-------------------------|---------------|----------------|
| <u>2450.2</u>  | STK 1/LED(RD)/48V DC BG | 4044211052409 | 100 ST         |

# Data sheet


## 2046.4 AP SI-1 BK

##INVERSE##CONTA-CONNECT



Disconnect terminal, Screw connection, Mounting type: Mounting rail TS 15/5.5, Rated cross-section: 4 mm², Width: 8 mm, Colour: Beige


| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2194.2</u>  | TK 2/15/K BG | 4044211050214 | 100            |



Disconnect terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 4 mm², Width: 8 mm, Colour: Beige

| Article number | Article name | GTIN (EAN)    | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2193.2</u>  | TK 2/K BG    | 4044211050191 | 100            |

##INVERSE##CONTA-CONNECT



Fuse-disconnect terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 4 mm², Width: 8 mm, Colour: Beige

| Article number | Article name             | GTIN (EAN)    | Packaging unit |
|----------------|--------------------------|---------------|----------------|
| <u>2453.2</u>  | STK 1/LED(RD)/230V DC BG | 4044211052430 | 100 ST         |