Data sheet 2486.1 ZB 4/6/K GNYE





Clamping yoke, Screw connection, Mounting type: Can be screwed on, Rated cross-section: 4 mm², Colour: Green-yellow

Business data

<u>2486.1</u>
ZB 4/6/K GNYE
4044211052799
50
PC
3.78 g
3.79 g
G
85369010
DE
2486.1
Clamping yoke

Data sheet






Dimensions	
Length	12 mm
Width	5.5 mm
Height	15 mm
Ratings	
Rated cross-section	4 mm ²
Connection data	
Connection principle	Screw connection
Wire cross-section single-core (rigid) / stranded, min.	0.5 mm ²
Wire cross-section single core (rigid)/stranded, max.	4 mm ²
Wire cross-section stranded, min.	0.5 mm ²
Wire cross-section stranded, max.	4 mm ²
Stripping length	12 mm
Screw head	Slotted
Screw threading	M 3
Tightening torque, min.	0.5 Nm
Tightening torque, max.	1 Nm
Materials	
Material	Steel
Surface	Galvanized, thick-film passivated
Insulation housing	Polyamide 6.6
Flammability class UL 94	V-2
Working temperature, min.	-40 °C
Working temperature, max.	105 °C
Screws	Steel
Surface screw	Galvanized, thick-film passivated
Further technical data	
Mounting type	Screwable
Environmental Product Compliance	
REACH Candidate Substance Note	No

Data sheet





Media

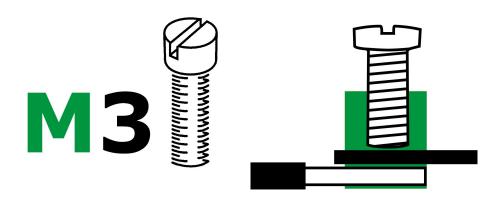

Data sheet 2486.1 ZB 4/6/K GNYE



Accessori	es						
Сар							
	Cap, Colour: G	Cap, Colour: Green-yellow					
	Article number	Article name	GTIN (EAN)	Packaging unit			
	2491.1	K 4/6 GNYE	4044211052904	50			
##INVEDCE	##CONTA CONNECT						
##INVERSE	##CONTA-CONNECT						
	Cap, Colour: G	Cap, Colour: Green-yellow					
	Article number	Article name	GTIN (EAN)	Packaging unit			
	2491.1	K 4/6 GNYE	4044211052904	50			