


1015.2

RK 1,5-4 BG

RK 1,5-4 BG

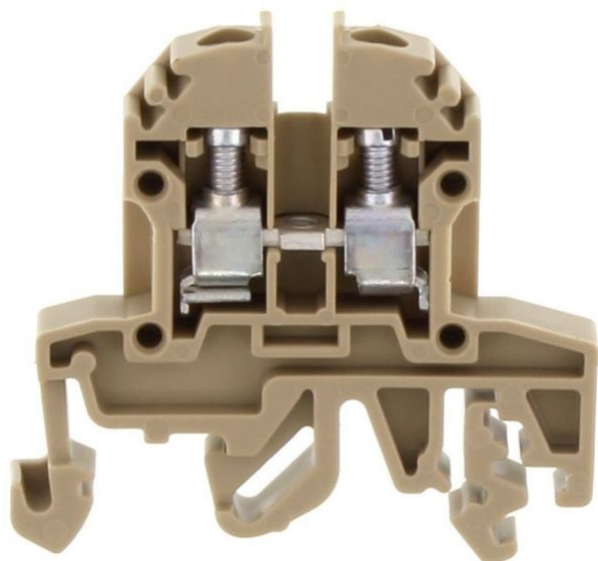

Feed-through terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 4 mm², Width: 6 mm, Colour: Beige

Business data

Product description	Feed-through terminal
Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	6.8
Weight per piece (including packaging)	7.29
Unit of weight	G
Customs number	85369010
Country of origin	DE

1015.2

RK 1,5-4 BG

RK 1,5-4 BG

Technical Data

Dimensions

Length	45 mm
Width	6 mm
Height TS 35/7.5	43.5 mm
Height TS 32	48 mm

Ratings

Rated voltage	500 V
Rated current	32 A
Rated cross-section	4 mm ²
Rated impulse voltage	6 kV
Overvoltage category	III
Contamination degree	3

1015.2

RK 1,5-4 BG

RK 1,5-4 BG

Technical Data

Connection data

Connection principle	Screw connection
Connection position	Lateral
Connections	2
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm ²
Wire cross-section single core (rigid)/stranded, max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	4 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	4 mm ²
Wire cross-section AWG, min.	22
Wire cross-section AWG, max.	10
Stripping length	9 mm
Screw head	Slotted
Screw threading	M 3
Tightening torque, min.	0.5 Nm
Tightening torque, max.	1 Nm

1015.2

RK 1,5-4 BG

RK 1,5-4 BG

Technical Data

Materials

Insulation housing	Polyamide 6.6
--------------------	---------------

Flammability class UL 94	V-2
--------------------------	-----

Working temperature, min.	-40 °C
---------------------------	--------

Working temperature, max.	105 °C
---------------------------	--------

Further technical data

Mounting type	Mounting rail TS 35/7.5 and TS 32
---------------	-----------------------------------

Gauge plug acc. to EN 60 947-1	A4
--------------------------------	----

Number of cross-connection channels	1
-------------------------------------	---

End plate required	✓
--------------------	---

1015.2

RK 1,5-4 BG

RK 1,5-4 BG

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

CSA approval

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	✓
----------------------	---

CSA Usegroup C: rated voltage	300 V
-------------------------------	-------

CSA Usegroup C: rated current	40 A
-------------------------------	------

CSA wire cross-section AWG, min.	22
----------------------------------	----

CSA wire cross-section AWG, max.	10
----------------------------------	----

CSA stripping length	9 mm
----------------------	------

CSA torque, max.	1 Nm
------------------	------

CSA torque, min.	0.5 Nm
------------------	--------

1015.2

RK 1,5-4 BG

RK 1,5-4 BG

Approvals

German Lloyd approval

GL approval	IEC 60947-7-1
GL approval granted	✓
GL rated voltage	500 V
GL rated current	34 A
GL rated cross-section	4 mm ²
GL environmental category	C

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-1
KEMA KEUR approval granted	✓
KEMA rated voltage	500 V
KEMA rated current	32 A
KEMA rated impulse voltage	6 kV
KEMA wire cross-section single core (rigid), min.	0.2 mm ²
KEMA wire cross-section single-core (rigid), max.	4 mm ²
KEMA wire cross-section stranded, min.	0.2 mm ²
KEMA wire cross-section stranded, max.	4 mm ²

1015.2

RK 1,5-4 BG

RK 1,5-4 BG

Approvals

UL Recognized


UL Recognized	UL 1059
UL Recognized granted	✓
UL Usegroup C: rated voltage	300 V
UL Usegroup C: rated current	30 A
UL wire cross-section single-core (rigid) AWG, min.	22
UL wire cross-section single-core (rigid) AWG, max.	10
UL wire cross-section stranded AWG, min.	22
UL wire cross-section stranded AWG, max.	10
UL torque	7 Lb In
UL wire material	Cu
UL factory wiring	✓
UL field wiring	✓

1015.2


RK 1,5-4 BG

RK 1,5-4 BG


Media

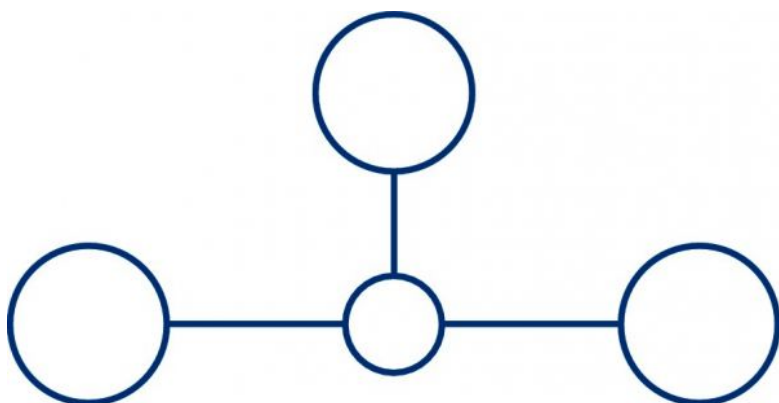

M3



EAC

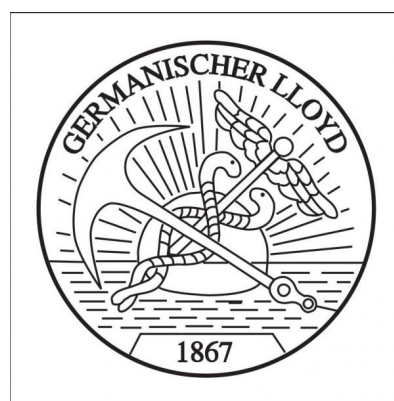

1015.2

RK 1,5-4 BG

RK 1,5-4 BG

Media



1015.2

RK 1,5-4 BG

RK 1,5-4 BG

Accessories

Cover



Cover, Length: 24 mm, Width: 1.3 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2011.0	AD 4/24/B	4044211048143	50 PC



Cover, Length: 24 mm, Width: 1.3 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2494.0	AD 4/24/B/E	4044211052959	50 PC

1015.2

RK 1,5-4 BG

RK 1,5-4 BG

Accessories

Cover



Cover, Length: 24 mm, Width: 1.3 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2493.0	AD 4/24/B/E	4044211052942	50 PC



Cover, Length: 24 mm, Width: 1.3 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2079.0	AD 4/24/B	4044211048877	50 PC

1015.2

RK 1,5-4 BG

RK 1,5-4 BG

Accessories

End plate



End plate, Width: 1.5 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2738.2	AP 1,5-4	4044211054748	50 PC

End bracket



End stop, Mounting type: Mounting rail TS 35/7.5,
Width: 7.5 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2005.2	ES 35	4044211048082	50 PC

1015.2

RK 1,5-4 BG

RK 1,5-4 BG

Accessories


Cross connector



Cross-connector, No. of poles: 10, Mounting type: Can be screwed on, Width: 59.3 mm, Rated cross-section: 4 mm², Colour: natural

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2090.0	Q 10	4044211048983	10 PC



Cross-connector, No. of poles: 2, Mounting type: Can be screwed on, Width: 10.5 mm, Rated cross-section: 4 mm², Colour: natural

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2087.0	Q 2	4044211048952	50 PC

1015.2

RK 1,5-4 BG

RK 1,5-4 BG

Accessories

Cross connector



Cross-connector, No. of poles: 3, Mounting type: Can be screwed on, Width: 16.6 mm, Rated cross-section: 4 mm², Colour: natural

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2088.0	Q 3	4044211048969	50 PC



Cross-connector, No. of poles: 4, Mounting type: Can be screwed on, Width: 22.7 mm, Rated cross-section: 4 mm², Colour: natural

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2089.0	Q 4	4044211048976	20 PC


1015.2

RK 1,5-4 BG

RK 1,5-4 BG

Accessories

Quick-marking



Terminal marker / Pocket Maxicard, Length: 5 mm,
Width: 6 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
4702.7	PMC SB 6/50 WH	4044211089986	500 PC

Screw driver



Screwdriver with bare blade, Colour: Black-grey

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1086.0	SDB 0,6x3,5	4044211014797	1 PC

1015.2

RK 1,5-4 BG

RK 1,5-4 BG

Accessories

Insulation plate



Insulation plate, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2566.2	TRS 3	4044211053567	100 PC

Partition plate



Partition plate, Width: 1.5 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2071.2	TW 1,5-4	4044211048792	50 PC
